

TB DAVIES

Always within reach



Comparison Sheet

Comparison Table

TESTED TO U-VALUE (LOWER IS BETTER)	1.11W/m2K	1.11W/m2K	0.667W/m2K	0.59W/m2K	1.11W/m2K	1.3W/m2K
HATCH THICKNESS	33mm	33mm	60mm	87mm	33mm	65mm
MATERIAL - FRAME	Plywood	Plywood	Spruce	Spruce	MDF	Metal + MDF
MATERIAL - STILE	Nordic Spruce	Nordic Spruce	Nordic Spruce	Nordic Spruce	Metal	Metal
MATERIAL - TREAD	Nordic Spruce	Nordic Spruce	Nordic Spruce	Nordic Spruce	Metal	Metal
HANDRAIL	-	Yes (x1)	Yes (x1)	Yes (x1)	-	-
ASSEMBLY	Final Assembly Required	Final Assembly Required	Final Assembly Required	Fully Assembled	Assembly Required	Assembly Required
LOCK MECHANISM	Simple	Simple	2-Part Metal Lock System	2-Part Metal Lock System	-	-
TREAD JOINT	Dove-Tailed	Dove-Tailed	Dove-Tailed	Dove-Tailed	-	-
FEET ON LADDER	-	✔	✔	✔	✔	✔
LOFT LADDER POLE	Yes (Timber)	Yes (Timber)	Yes (Timber)	Yes (Metal)	Yes (Metal)	-
FIRE RATED (EN 1634)	-	-	✔	-	-	✔
OPERATION	Manual	Manual	Manual	Manual	Manual	Electric (Remote)
STANDARD EN 14975	✔	✔	✔	✔	✔	✔




EuroFold




EnviroFold



FireFold

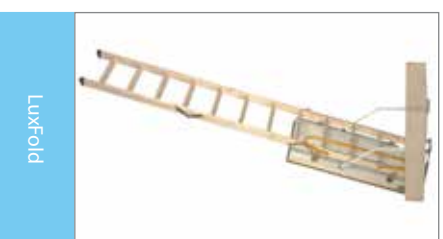

LuxFold

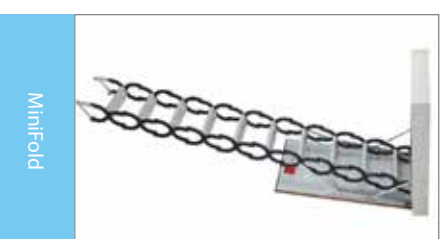

MiniFold



Electric