


Tubesca EN131 Pro Platinum Single Section Ladder

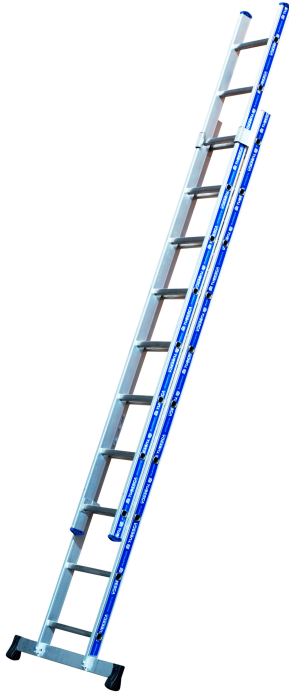

Specifications

- Warranty: 5-year
- Max Load: 150kg
- Standard: EN131 Professional
- Material: Aluminium
- Commodity Code: 76169990
- Country of Origin: FR
- Recommended Usage: Intensive

Common Dimensions

- Rung Depth: 30mm
- Distance Between Rungs: 250mm

Availability & Delivery

Stock item. Delivery next day.

(See exceptions, if applicable, overleaf)

[Representative image of product]

Features

- Supplied with wide stabiliser bar (ladders over 3m)
- Strong rung connection - triple crimped for maximum strength
- Reinforced stiles fitted with 30mm square rungs
- Ideal for use on construction sites and facilities maintenance
- Large, oversized ribbed, non-slip feet
- Reliable and robust and easy to use

Product Dimensions

SKU	Rung Count	Closed Length (mm)	Last Climbing Height	Approx. Working Height ¹ (mm)	Extended Length (mm)	Width (mm)	Depth (mm)	Nett Weight (kg)
1101-000	8 x 1	2410	1510	3110	2410	360	100	4.1
1101-001	10 x 1	2970	2070	3670	2970	360	100	5.0
1101-002	12 x 1	3560	2660	4260	3560	360	100	6.2
1101-003	14 x 1	4120	3220	4820	4120	430	100	7.5
1101-004	16 x 1	4680	3780	5380	4680	430	100	8.4
1101-005	17 x 1	4960	4060	5660	4960	430	100	9.7
1101-006	18 x 1	5240	4340	5940	5240	430	100	10.3

¹ Working height is calculated as 1,600mm plus platform height or last climbing tread, whichever is appropriate. Ladders set at an angle of 75° degrees.

Tubesca EN131 Pro Platinum Single Section Ladder

Product Description

Fully EN131 Professional compliant Single Section Industrial Ladder available in a range of sizes. For models over 3m long, the ladder is supplied with a conforming stabiliser bar that is simple to attach and use. The ladder is designed for intensive use and is lightweight to transport from vehicle to site and ideal to use in a range of work environments.

Shipping Dimensions

SKU	Barcode	Shipping Length (mm)	Shipping Width (mm)	Shipping Depth (mm)	Shipping Volume (m ³)	Gross Weight (kg)
1101-000	5060356912698	2410	360	100	0.087	6.7
1101-001	5060356912704	2970	360	100	0.107	8.2
1101-002	5060356912711	3560	360	100	0.128	10.0
1101-003	5060356912728	4120	430	100	0.177	12.0
1101-004	5060356912735	4680	430	100	0.201	13.5
1101-005	5060356912742	4960	430	100	0.213	15.1
1101-006	5060356912759	5240	430	100	0.225	16.1

Packaging Material: Wooden Battens