

# 1250 PODIUM UNIT ASSEMBLY GUIDE

- 9 ) TO MOVE UNIT UNLOCK GATE AND DISMOUNT, UNLOCK CASTORS AND RE-LOCATE
- 10 ) SAFE WORKING LOAD ON WORK PLATFORM 150Kg OR ONE MAN PLUS HAND TOOLS.
- 11 ) DO NOT OVER REACH WHEN WORKING ON PLATFORM. AND LIMIT HORIZONTAL FORCE TO 10Kg ( 22 lb ) WORK ONLY AT A COMFORTABLE ARMS LENGTH.
- 12 ) DO NOT, UNDER ANY CIRCUMSTANCES, MOVE UNIT WITH ANYONE ON IT.
- 13 ) NEVER PUT ANYTHING ON THE PLATFORMS TO GAIN EXTRA HEIGHT, STAND ON THE WORK PLATFORM ONLY.
- 14 ) NEVER USE DAMAGED OR INCOMPATIBLE EQUIPMENT.
- 15 ) IF IN DOUBT ABOUT ANY APPLICATION DO NOT GUESS CONSULT YOUR SUPPLIER.
- 16 ) SEE OVERLEAF FOR CHECKLIST.

## COMPONENT LIST

- 1 x 1250 PODIUM FRAME (C/W 4 x CASTORS or 2 x CASTORS & 2 x BASEPLATES)
- 1 x ACCESS LADDER
- 1 x PODIUM PLATFORM
- 2 x STABILISER (MINI OR STANDARD) FOR FULL PAS 250 COMPLIANCE

## PODIUM SAFETY CHECKLIST

### TO BE CARRIED OUT AT LEAST ONCE A WEEK

CHECKLIST DESCRIPTION	DATE	CHECKED BY
CHECK CASTORS ARE FIRMLY FIXED AND LOCKING MECHANISMS ARE FUNCTIONING CORRECTLY, IF NOT, ADJUST TO SUIT.		
CHECK STEP HOOK MECHANISMS ARE LOCKING CORRECTLY		
DECKING SHOULD BE CHECKED FOR DAMAGE AND FREE OF ANY MATERIAL LIKELY TO CAUSE SLIPPING i.e OIL etc.		
CHECK PIVOT BOLTS ARE SECURE AND ALLOW FREE MOVEMENT		
TEST CENTRE LOCKING MECHANISMS ARE FUNCTIONING CORRECTLY		
TEST GATE FOR MOVEMENT AND LOCKING ON VERTICAL ABOVE PIN		
CHECK ALL WELDS FOR CRACKS AND TUBE DAMAGE		
CHECK ALL LABELS ARE FIXED AND READABLE.		
CHECK THAT ERECTED STEPS ARE USED ON A LEVEL SURFACE.		
CHECK FOR CORRECT POSITIONING OF PLATFORM AND STEPS		



Dimensions — Platform at 1.25M x Width –0.65M x Depth 1.3M


Dimensions — Folded Height –2.26M x Width - 0.25M x Depth - 1.3M  
 Weight—43kg Safe Working Load - 150kg  
 Manufactured under an ISO9001:2008 Quality System  
 Complies fully with the Working at Height Regulations 2005 and PAS250 Specifications  
 Lightweight all Aluminium Construction

For further information or assistance, please contact  
 Interlink Alloy Systems Limited—Tel 01992 716509  
 Or visit: [www.interlinkalloy.co.uk](http://www.interlinkalloy.co.uk)

# PAS 250 1250 PODIUM UNIT ASSEMBLY GUIDE



1 X FOLDING FRAME  
1 X PLATFORM  
1 X LADDER  
2 X STABILISER( MINI  
OR STANDARD)

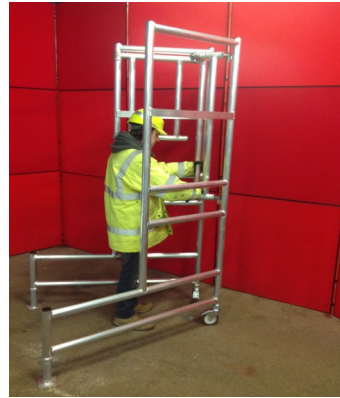

2) OPEN FRAME AND LOCK  
MECHANISM



3) FIT PLATFORM AT  
CORRECT HEIGHT



4) POSITION UNIT AND  
LOCK CASTORS



5) CLIP UPPER BRACE OF  
LADDER TO VERTICALS  
WITH ASSEMBLED HOOKS  
AT TOP



6) FIT STABILISERS TO  
BACK VERTICALS



7) USE LADDER TO  
ACCESS PLATFORM



8) CLOSE AND  
LOCK GATE